

ECO-S Line Positioners

Welding Positioner ECO-S300


Features

- Tilting range up to 90° manually infinitely adjustable via crank handle
- Foot switch Start/Stop.
- Switch for cw/ccw turning.
- Rotation time adjustable.
- The turntable speed is adjustable from 0,5 to 5 U/min.
- Controlling to integ. control system
- 350A ground connection

up to
300 kg

with
90 mm
hollow shaft

Model	ECO S300
Supply voltage	1PH/230 V – 50/60 Hz DC PCB
Rotation motor	200 W
hollow shaft ø	90 mm
Tilting range	0° - 90°
Worktable diameter	500 mm
Rotation speed	0,2 - 2,5 rpm
MaxMax. horizont load	300 kg
Max. vertical load	100 kg
Tilting methode	manual
horizontal height	650 mm
Center height of	445 mm
Weight	90 kg
Item no.	02.30.01.00065
PC	C

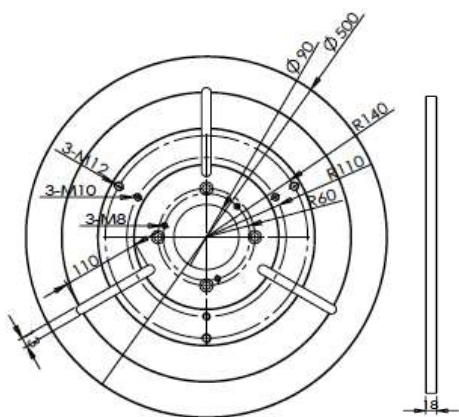

Turntable plate ECO S300

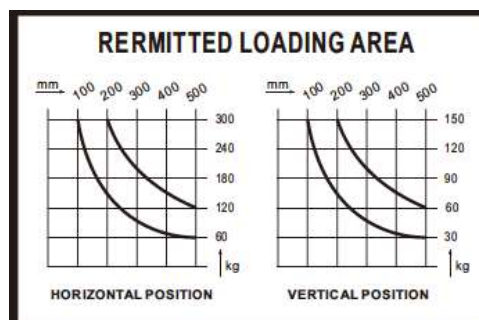


Diagram: ECO S300

When choosing your positioner, please consider:

- the center of gravity of your workpiece
- the weight of your tensioning device(chuck)

Scope of delivery:

- 1 control system (integ.)
- 1 Foot switch